


4000 Series 4006-23TAG2A

695 kWm @ 1500 rpm net standby power Diesel Engine – Electropak

The Perkins® 4000 Series family of 6, 8, 12 and 16 cylinder diesel engines was designed in advance of today's uncompromising demands within the power generation industry and includes superior performance and reliability.

The 4006-23TAG2A is a turbocharged and air-to-air charge cooled, 6 cylinder diesel engine offered with either temperate or tropical cooling. Its premium features and design provide economic and durable operation as well as an exceptional power to weight ratio, excellent load acceptance and improved gaseous emissions, plus the overall performance and reliability characteristics essential to the power generation market.

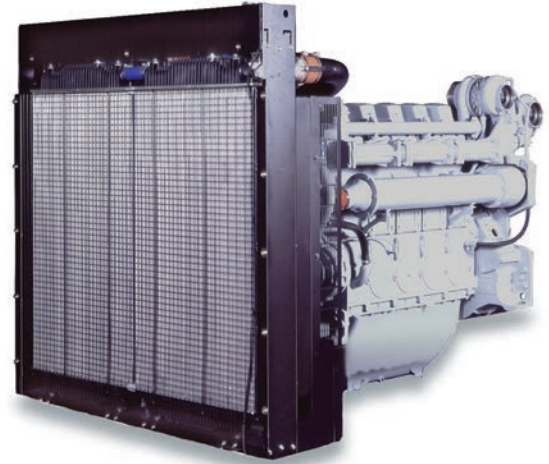

Specification		
Number of cylinders	6 vertical in-line	
Bore and stroke	160 x 190 mm	6.3 x 7.5 in
Displacement	22.921 litres	1397 in ³
Aspiration	Turbocharged and air-to-air charge cooled	
Cycle	4 stroke	
Combustion system	Direct injection	
Compression ratio	13.6:1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	113.4 litres	29.5 US gal
Cooling system	Water-cooled	
Total coolant capacity	105 litres	27.7 US gal

RAD Diesel

021-58437

4000 Series 4006-23TAG2A

Features and benefits

695 kWm @ 1500 rpm net standby power Diesel Engine – Electropak

Dependable power

- Individual 4 valve cylinder heads giving optimised gas flows
- Unit fuel injectors ensure ultra fine fuel atomisation and hence controlled rapid combustion
- Commonality of components with other engines in the 4000 Series family for reduced stocking levels
- Capable emissions of 1/2 TA Luft (1986)

Low operating costs

- Oil change service intervals are set at 500 hours as standard
- Designed to provide low cost of ownership, simple maintenance and reduced downtime
- Class leading warranty
Prime power - 12 months unlimited hours. For engines that operate less than 6,000 hours the warranty is available for two years or until the application reaches 6,000 hours (whichever is sooner).
Standby power - three years or 1,500 hours (whichever is sooner).
See Perkins Warranty Policy for further details
- Perkins Platinum Protection - comprehensive cover from as little as 5 percent* of the cost of your engine

World class product support

- Our experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their disposal, covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Perkins actively pursues product support excellence by insisting our distribution network invest in their territory to provide customers with a consistent quality of support across the globe
- Throughout the entire life of a Perkins engine, we provide access to genuine parts giving 100% reassurance that you receive the very best in terms of quality for lowest possible cost, wherever your Perkins powered machine is operating in the world

*Terms and conditions apply

RAD Diesel

021-58437

Technical information

Air inlet system

- Mounted air filter and turbocharger

Fuel system

- Digital governing to ISO 8528-5 Class G2 with isochronous capability

Direct fuel injection system with in-line pump Diesel Engine – Electropak

- Full flow spin-on filters

Lubrication system

- Wet full aluminium sump with filler and dipstick
- Full flow spin-on oil filters

Cooling system

- Twin thermostats, water pump
- System designed for ambient temperatures up to 50°C
- Radiator supplied loose incorporating air-to-air charge cooler

Electrical equipment

- 24V starter motor, 24V alternator with integral regulator and DC output
- Turbine inlet temperature protection
- High coolant temperature protection switch
- Low oil pressure protection switch

Flywheel and housing

- Flywheel to SAE J620 size 18
- SAE 'O' flywheel housing

Optional equipment


- 4 meter wiring harness
- Secondary electric start
- Immersion heater
- Exhaust counter flanges
- Single exhaust outlet pipe
- Temperate radiator kit

RAD Diesel

021-58437

4000 Series 4006-23TAG2A

695 kWm @ 1500 rpm net standby power Diesel Engine – ElectropaK

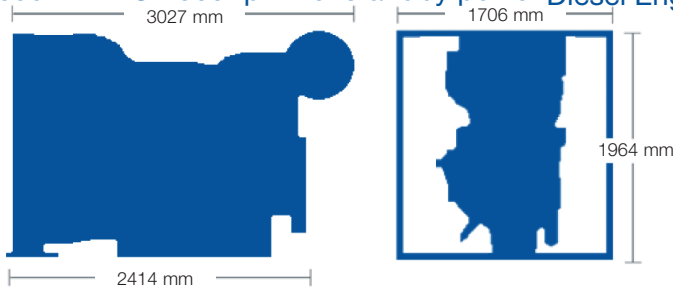

Engine package weights and dimensions

Engine package weights and dimensions		
Length	3027 mm	119 in
Width	1706 mm	67 in
Height	1964 mm	77 in
Weight (dry)	2524 kg	5564 lb

RAD Diesel

021-58437

4000 Series 4006-23TAG2A

695 kWm @ 1500 rpm net standby power Diesel Engine – Electropak

Speed rpm	Type of operation	Typical generator output (Net)		Engine power			
				Gross		Net	
		kVA	kWe	kWm	hp	kWm	hp
1500	Continuous baseload	600	480	531	712	505	677
	Prime power	750	600	658	882	632	847
	Standby (maximum)	825	660	721	967	695	932

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1. Derating may be required for conditions outside these; consult Perkins Engines Company Limited.

Generator powers are typical and are based on an average alternator efficiency and a power factor (cos. θ) of 0.8. Fuel specification: BS 2869: Part 2 1998 Class A2 or ASTM D975 D2. Lubricating oil: 15W40 to API CG4.

Rating definitions

Baseload power: Power available for continuous full load operation. No overload is permitted on baseload power. **Prime power:** Power available at variable load with a load factor not exceeding 80% of the prime power rating. There is no overload permitted on baseload power. **Standby power:** Power available in the event of a main power network failure up to a maximum of 500 hours per year of which up to 300 hours may be run continuously. Load factor may be up to 100% of standby power. No overload is permitted.

Percent of prime power	Fuel consumption at 1500 rpm g/kWh	Fuel consumption at 1500 rpm l/hr
Standby power	210	173
Prime power	209	157
Baseload power	210	127
75%	211	121
50%	213	83

RAD Diesel

021-58437