



راد دیزل نمایندگی ژنراتور مکالته ایتالیا

021- 58437

www.raddiesel.ir

2 POLE
1 PHASE
IP23

CHARACTERISTICS

50 Hz

Type	115/230V 50Hz 3000 RPM									
	kVA CL. H	η 2/4 1 p.f. %	η 3/4 1 p.f. %	η 4/4 1 p.f. %	T.H.D. %	Air volume m ³ /min	Noise		Weight Kg	J Kgm ²
		7m dBA	1m dBA							
S16F -150	5,5	76,4	79,2	79	< 6	3,4	60	78	28	0,0105
S16F -180	6,5	76,8	79,7	79,5	< 6	3,4	60	78	31	0,0174

60 Hz





Type	120/240V 60Hz 3600 RPM									
	kVA CL. H	η 2/4 1 p.f. %	η 3/4 1 p.f. %	η 4/4 1 p.f. %	T.H.D. %	Air volume m ³ /min	Noise		Weight Kg	J Kgm ²
		7m dBA	1m dBA							
S16F -150	6,6	76,8	79,7	79,6	< 6	4,3	62	80	28	0,0105
S16F -180	7,8	77,1	80,3	80,1	< 6	4,3	62	80	31	0,0174



OVERALL DIMENSIONS

dimensions in mm.

راد دیزل نمایندگی ژنراتور مکانته ایتالیا
021- 58437 www.raddiesel.ir

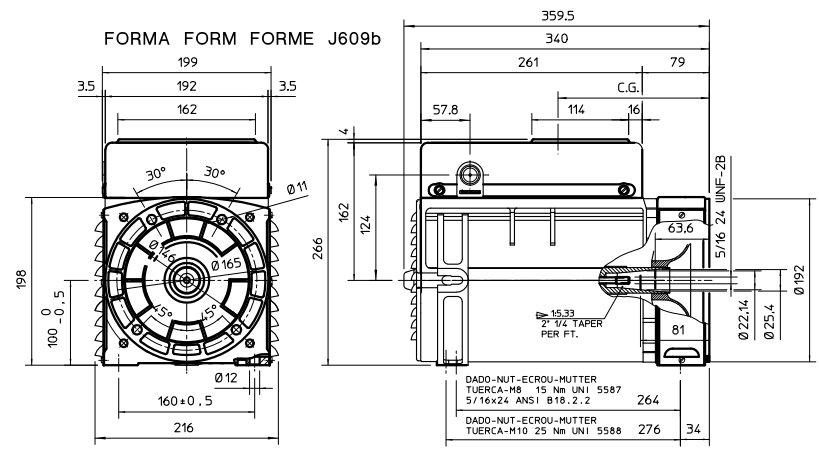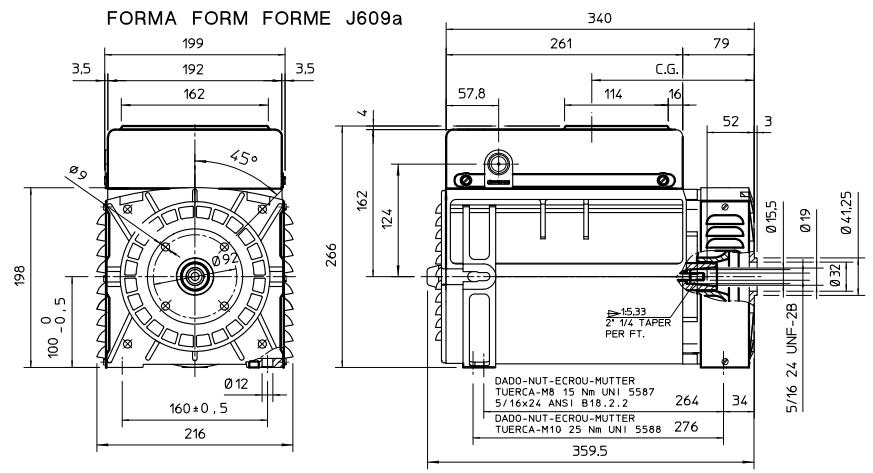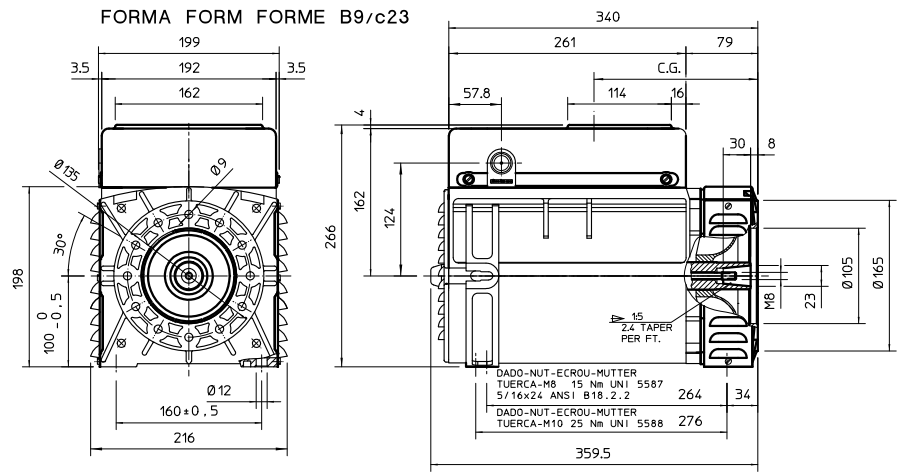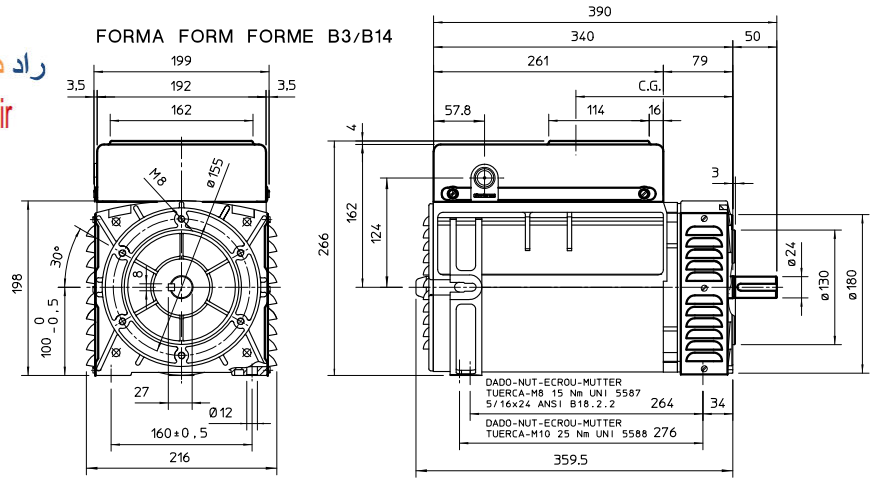

FORM	CG	
	150	180
B14	178	163
B9	180	165
J609a	179	164
J609b	179	164

RAD Diesel

021-58437